

N3400CB

The *NEW CLASS* of Corrugated Strapping Machines

High Speed Automatic Strapping Machine

Designed for
the Corrugated
Industry

Innovative,
Reliable, Low
Maintenance and
Energy Saving



UP TO
32
BUNDLES\MIN.



- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- DAT 'Direct-Access-Technology'
- Green Tech energy concept, low power consumption

Dynaric, Inc.



N3400CB



Simple, Easy to Use, Reliable Corrugated Strapping Machine Technology

Fewer moving wear parts:

No belts, clutches, brakes, solenoids or rubber strap drive rollers



All metal strap drive rollers minimize strap dusting



HOT knife sealing technology:

Proven time tested, efficient and low cost.



DAT (Direct-Access-Technology):


No tools are needed to access strap path for cleaning

At A Glance

- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- Automatic Strap feed
- Strap width 5 - 12 mm.
- DAT 'Direct-Access-Technology'
- The exclusive eject function avoids strap jam
- Torque controlled strap tension, adjustable
- Upstream and downstream interlocks
- Conveyor speed steplessly adjustable
- Green Tech energy concept, low power consumption
- Intuitive operator interface
- MFT 'Mono-Frame-Technology'
- SAO 'Safe and Open' - Safe without protection doors
- Table height steplessly adjustable
- Bundle flow control
- Wear-free, energy saving direct-drive-motors
- Low maintenance and low wear strap arch

Optional

- Bundle stops
- Bundle press

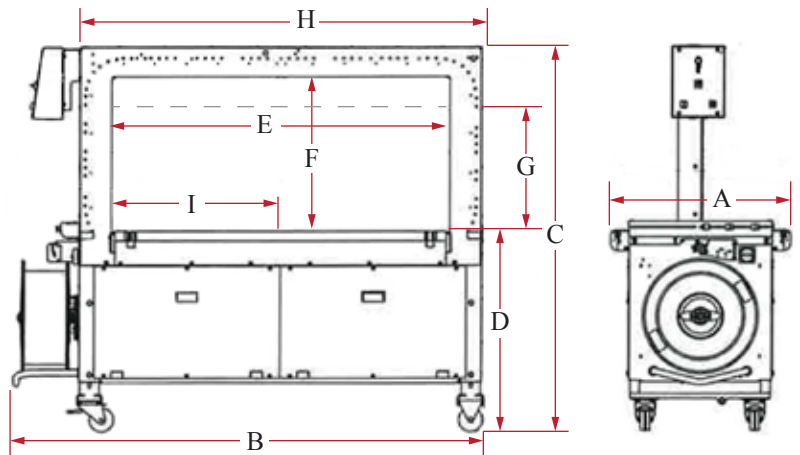

Arch Size WxH (to order)		1250x400	1250x600	1650x600
Sealing Head Centered		X	X	X
Total length + Coil	B	1947mm	1947mm	2347mm
Total Height	C	1255-1585mm	1555-1785mm	1555-1785mm
Sealing Head Position	I	700mm	700mm	700mm
Inner Arch Width	E	1400mm	1400mm	1800mm
Arch Width	H	1709mm	1709mm	2109mm
Inner Arch Height With Press	G	305mm	505mm	505mm
Inner Arch Height	F	440mm	640mm	640mm
Weight in lbs.		760	772	882

Overall Width:	(A) 29.3" (746mm)
Overall Length:	(B) 46.6 - 92.4" (1947-2347mm)*
Overall Height:	(C) 49.4 - 70.2" (1255-1785mm)*
Table Height:	(D) 30.9 - 40.0" (787-1017mm)
Weight:	760-882 lbs. (345-400 kg)*
Cycle Time:	Up to 32 cycles per minute
Cycle Initiation:	Photo eye sensor
Standard Arch Size:	1250mm(W) x 400mm(H)
Strap Size:	5mm - 12mm
Package Size:	Max. Governed By Arch Min. .4" H x 3.9" W
Tension:	Adjustable electronic control
Seal Head Location:	Bottom
Sealing Method:	Heat Seal
Mobility:	3" Casters
Dispenser:	Externally located- 8" or 9" I. D./8" Face/18" O.D.
Power:	120V 1Phase - 480V 3Phase

* Depending on Arch Size

