

N3400HZT

The Versatile, Vertical Strapping Machine

- User-friendly and intuitive
- Economical owing to highest availability
- Robust and extremely low maintenance
- Powerful
- Variable strap width



EQUIPMENT:

- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- Automatic Strap feed
- Strap width 5 - 12 mm
- Operation Terminal with Soft-Button
- DAT 'Direct-Access-Technology'
- The exclusive eject function avoids strap jam
- Torque controlled strap tension, adjustable
- GreenTech energy concept, low power consumption
- Intuitive operator interface
- Wear-free, energy saving direct-drive-motors

Certified Minority Owned Company

Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com


Dynaric, Inc.



40 YEARS

N3400HZT

The Versatile, Vertical Strapping Machine

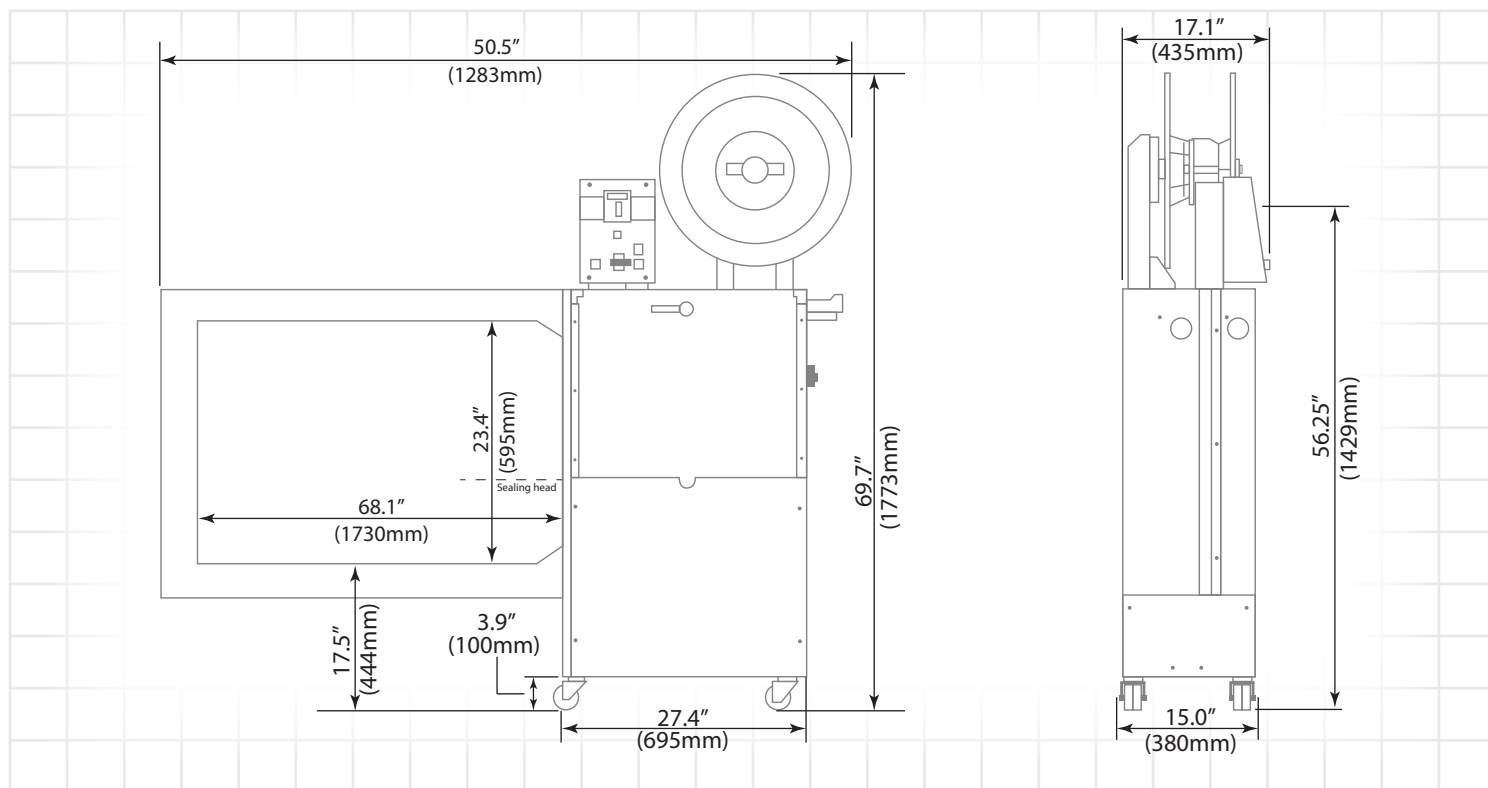

Technical Specifications

CAPACITY:

Single strap bundles/minute up to: 45
Depending on arch size and tension force

BUNDLES :

Width in mm
Min.: 5
Max. bundle width depending on arch size
Height in mm
Min.: 55
Max. bundle height depending on arch size (see drawing)
Weight in kg
Max.: 30

STRAP TENSION:

Adjustable with 10 steps
Automatic strap tensioning
Tension at bundle in N
Max.: 325

STRAPPING MATERIAL:

Polypropylene DIN EN 13 394
Width in mm: 5 - 12
Thickness in mm: 0.4 - 0.65

SEALING METHOD :

Heat seal. Tensile strength of welded joint is approx. 80% of the breaking strength of the strap

STRAP COIL:

Core ID in mm: 406
Core OD in mm: 610
Width in mm: 152

POWER SUPPLY:

Wide Range Input 100-240V, 1 AC; 47 - 63 Hz
Wide Range Input 380-520V, 3 AC : 47 - 63 Hz
Maximum fusing 16A (B-character)
Protection Type: IP 22

POWER CONSUMPTION:

Total consumption approx. in kW: 0.25

WEIGHT:

Total weight approx. in lbs. 441

OPERATING CONDITIONS :

Temperature range in °C [°F]: +5 [41] - +45 [113]