



Our non-metallic polypropylene is a versatile and economic polyolefin with excellent tenacity and recovery characteristics. It's wide range of processing properties make it a superior choice for plastic strapping in all applications from light to heavy duty with an emphasis on economy.

### POLYPROPYLENE STRAP EMBOSSED

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
P1097	4.0	0.42	100	45,000	8x8	W
P1100	4.5	0.42	100	25,000	8x8	W
PB1100	4.5	0.42	100	25,000	8x8	W
PB985	4.5	0.42	100	40,000	8x8	W
P1135	4.5	0.45	135	19,200	8x8	W
P1115	4.7	0.50	115	24,000	8x8	CL,W
P1115	4.7	0.50	115	24,000	9x8	W,Y
P1115	4.7	0.50	115	40,500	8x9 XL	W
PB1115	4.7	0.50	115	40,500	8x9 XL	W
P120	4.7	0.52	120	25,000	9x8	W,Y
P120	4.7	0.52	120	37,000	9x9 XL	W,Y
PB120	4.7	0.52	120	37,000	9x9 XL	W,Y
P120	4.7	0.52	120	25,000	8x8	CL,W,Y
PB120	4.7	0.52	120	25,000	8x8	CL,W
P120	4.7	0.52	120	15,000	8x6	W
P120	4.7	0.52	120	40,000	8x9 XL	W
PB120	4.7	0.52	120	40,000	8x9 XL	W,Y
P121	4.7	0.52	120	25,000	8x7.35	W
P977	4.7	0.52	120	23,000	8x8	W
P1130	4.7	0.36	130	24,000	8x8	CL
P136	5.0	0.45	115	20,000	8x8	W,Y
P956	5.0	0.45	115	16,750	8x8	W
PB2135	5.4	0.45	145	29,000	8x8	B,BL,G,OR,W,Y
P2135	5.4	0.45	145	29,000	9x8	B,BL,G,OR,W,Y
P2135	5.4	0.45	145	22,400	8x6.75	CL,W,Y
PB2135	5.4	0.45	145	22,400	8x6.75	CL,W,Y
P2135	5.4	0.45	145	37,500	8x9 XL	W,Y
P2135	5.4	0.45	145	35,000	9x9 XL	W,Y
PB2135	5.4	0.45	145	35,000	9x9 XL	B,BL,G,OR,R,W,Y
PB983	5.4	0.45	145	31,500	8x8	W
P2145	5.4	0.32	145	25,000	8x8	CL
P970	5.7	0.43	170	20,000	9x8	Y
P971	5.7	0.43	170	18,000	9x8	B,Y
P973	5.7	0.43	170	19,500	8x8	W
P2160	5.7	0.43	170	19,500	8x6.75	BL,W,Y
PB2160	5.7	0.43	170	19,500	8x6.75	CL,W
P2160	5.7	0.43	170	37,000	8x9 XL	W
PB2160	5.7	0.43	170	37,000	8x9 XL	W
P2260	5.7	0.48	170	19,500	8x6.75	W
P180	5.7	0.55	180	16,500	8x6.75	W

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
P2140	5.8	0.51	160	23,000	9x8	OR,G,BL,Y,W
PB2140	5.8	0.51	160	23,000	9x8	BL,Y
P2140	5.8	0.51	160	30,500	9x9 XL	OR,G,BL,Y,W
PB2140	5.8	0.51	160	30,500	9x9 XL	OR,G,BL,Y,W
P2140	5.8	0.51	160	23,000	8x8	CL,W,Y
PB2140	5.8	0.51	160	23,000	8x8	W,Y
P2140	5.8	0.51	160	33,000	8x9 XL	W,Y
PB2140	5.8	0.51	160	33,000	8x9 XL	W,Y
P974	5.8	0.51	160	18,000	9x8	CL,B,Y
P974	5.8	0.51	160	18,000	8x8	Y
P2200	5.8	0.60	190	18,500	8x8	CL,W
P2210	5.8	0.63	210	18,500	9x8	B,Y
P2210	5.8	0.63	210	18,500	8x8	CL,W,Y
P2210	5.8	0.63	210	25,000	9x9 XL	B
PB2210	5.8	0.63	210	25,000	9x9 XL	B
P2280	6.0	0.51	170	22,000	9x8	-ALL-
PB2280	6.0	0.51	170	22,000	9x8	B
P2280	6.0	0.51	170	29,500	9x9 XL	Y
PB2280	6.0	0.51	170	29,500	9x9 XL	BL,OR,Y
P2280	6.0	0.51	170	22,000	8x8	CL,BL,OR,W
P998	6.0	0.51	170	22,000	8x8	Y
P976	6.0	0.51	170	15,000	8x8	W,Y
P141	6.2	0.42	155	18,000	4x6	Y
P142	6.2	0.55	200	15,000	4x6	Y
P140	6.3	0.43	170	18,000	9x8	Y
P145	6.3	0.56	225	18,000	9x8	CL,W,Y
P145	6.3	0.56	225	18,000	8x8	W
P146	6.3	0.58	185	18,000	9x8	W,Y
P146	6.3	0.58	185	18,000	8x8	W,Y
P146	6.3	0.58	185	18,000	11x8	W
P154	6.3	0.51	185	20,000	9x8	BL,CL,OR,W,Y
P2225	6.5	0.60	220	18,000	8x8	BL,Y
P2275	6.7	0.68	250	16,500	8x8	BL
PB2275	6.7	0.68	250	16,500	8x8	BL
P153	6.8	0.58	230	17,000	9x8	OR,W,Y
P500	6.8	0.64	225	16,500	8x8	B,BL,OR,W,Y
P2240	7.6	0.66	240	13,100	16x6	W
P3200	8.0	0.51	200	17,000	8x8	W
PB3200	8.0	0.51	200	17,000	8x8	W
P3200	8.0	0.51	200	17,000	9x8	W
PB3200	8.0	0.51	200	17,000	9x8	W
P3220	8.0	0.55	220	12,900	9x8	B,W,Y
PB3220	8.0	0.55	220	12,900	9x8	W,B,OR,R
P3220HE	8.0	0.55	130	12,900	9x8	G,W
PB3220	8.0	0.55	220	10,000	8x6	W
PB3220	8.0	0.55	220	20,750	8x9 XL	W
P3220	8.0	0.55	220	12,900	8x8	B,W
PB3220	8.0	0.55	220	12,900	8x8	W
PB997	8.0	0.55	220	17,000	8x8	W
P386	8.5	0.53	200	12,900	9x8	W

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
P385	8.6	0.48	200	12,900	9x8	W,Y
P385	8.6	0.48	200	12,900	8x8	W
P969	8.6	0.48	200	12,000	8x8	W
P3225	8.7	0.55	250	12,900	16x6	W
PB3225	8.7	0.55	250	12,900	16x6	W
P3225	8.7	0.55	250	12,900	9x8	B,BL,CL,G,W,Y
PB3225	8.7	0.55	250	12,900	9x8	W,Y,B
P3225	8.7	0.55	250	12,900	8x8	B,W,Y,CL
PB3225	8.7	0.55	250	19,250	8x9 XL	
PB3225	8.7	0.55	250	12,900	8x8	W
P3225	8.7	0.55	250	10,000	8x6	CL,W
PB988	8.7	0.55	250	12,000	8x8	W
PB988	8.7	0.55	250	12,000	9x8	W
P3024	9.0	0.68	410	8,700	9x8	B,W
P3024	9.0	0.68	410	8,700	16x6	B,W
P966	9.0	0.55	300	12,900	16x6	W
P380	9.0	0.46	200	12,900	9x8	W
P382	9.0	0.55	300	10,000	11x8	W
P382	9.0	0.55	300	12,900	9x8	B,BL,CL,W,Y
P382	9.0	0.55	300	12,900	8x8	CL, W,Y
P382	9.0	0.55	300	10,000	8x6	B,CL,G,W
P384	9.0	0.58	320	12,900	9x8	CL,W,Y
P384	9.0	0.58	320	12,000	16x6	B,BL,G,OR,P,W,Y
PB384	9.0	0.58	320	12,000	16x6	B,BL,OR,P,W,Y
P384	9.0	0.58	320	12,900	8x8	W
PB991	9.0	0.58	320	14,400	8x8	Y
P3510	10.0	0.71	510	8,900	16x6	B,BL,W
P3625	10.5	0.79	625	8,000	16x6	B
P4540	10.5	0.80	540	7,600	9x8	B
P5350	11.5	0.45	260	9,900	9x8	W
PB5350	11.5	0.45	260	9,900	9x8	W
PB5350	11.5	0.45	260	16,250	9x9 XL	W
P5350	11.5	0.45	260	9,900	8x8	W
P5300	11.5	0.55	300	9,900	9x8	B,BL,CL,G, W,Y
PB5300	11.5	0.55	300	9,900	9x8	W
P5300-9HE	11.5	0.55	190	9,900	9x8	W
P5300	11.5	0.55	300	9,900	8x8	B,BL,
P5300	11.5	0.55	300	9,000	8x6	WCL,G,W, Y
P5300	11.5	0.55	300	9,900	16x6	CL, W
P5300	11.5	0.55	300	7,500	11x8	B,BL,W,Y,O,P,G
PB4390	11.5	0.60	390	9,900	9x8	W
P4390	11.5	0.60	390	9,900	8x8	W
P4024	12.0	0.67	550	6,600	16x6	W
PB4024	12.0	0.67	550	6,600	16x6	B,CL,W
P4024	12.0	0.67	550	6,600	9x8	CL
P979	12.0	0.67	550	9,000	9x8	CL, B,W
P4024	12.0	0.67	550	6,600	8x8	W
P4024	12.0	0.67	550	7,500	8x6	CL
P414	12.0	0.63	425	7,546	8x8	B,W
P414	12.0	0.63	425	7,546	11x8	W

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
P414	12.0	0.63	425	9,000	16x6	W
P415	12.0	0.67	440	8,947	16x6	B,BL,G,OR,W,Y
PB415	12.0	0.67	440	8,200	9x8	W
P415	12.0	0.67	440	8,200	9x8	W
P415	12.0	0.67	440	8,200	8x8	B,W
P415	12.0	0.67	440	7,200	8x6	BL
DM7000	12.0	0.67	440	7,000	16x6	BL
PB7000	12.0	0.67	440	7,000	16x6	BL
P7000	12.0	0.67	440	7,000	9x8	BL
P418	12.0	0.72	550	8,202	9x8	W
P418	12.0	0.72	550	5,906	11x8	W
P418	12.0	0.72	550	8,202	16x6	B, W
P418	12.0	0.72	550	10,600	24x6	B
P419	12.0	0.72	550	8,202	16x6	B, W
P420	12.0	0.80	625	9,515	24x6	Y
P420	12.0	0.80	625	7,218	16x6	B,BL,W,Y
P964	12.0	0.80	625	6,000	16x6	BL
P420	12.0	0.80	625	7,218	9x8	W,Y
P421YPS	12.0	0.83	675	9,515	24x6	Y
P421	12.0	0.83	675	7,218	16x6	BL,DBL,Y
P425	12.0	0.95	800	8,000	24x6	B,Y
P425	12.0	0.95	800	5,577	16x6	B
P425	12.0	0.95	800	5,577	9x8	B
P503	12.0	0.55	350	9,900	9x8	B,W,CL,Y,BL
P503	12.0	0.55	350	9,900	8x8	W,CL
P503	12.0	0.55	350	9,900	16x6	W
P503	12.0	0.55	350	9,000	8x6	B,CL,W,Y
P504	12.0	0.60	340	9,000	9x8	W
P504	12.0	0.60	340	9,000	8x8	W
P504	12.0	0.60	340	8,000	8x6	W,Y,CL
RS562BHG	12.0	0.33	250	9,000	16x6	B
P954WHG	12.0	0.33	250	18,000	16x6	W
P582	12.0	0.33	250	9,000	8x8	Y
RS582BHG	12.0	0.33	250	9,000	8x8	B
RS533BHG	12.2	0.52	300	4,500	16x3	B
RS563BHG	12.2	0.52	300	9,000	16x6	B
RS583BHG	12.2	0.52	300	9,300	8x8	B
P583WHG	12.2	0.52	300	9,300	8x8	W
RS535BHG	12.5	0.66	495	3,600	16x3	B
RS565BHG	12.5	0.66	495	7,200	16x6	B
RS515BHG	12.5	0.66	495	7,200	11x8	B
P986	12.5	0.66	495	6,600	16x6	B
P565YHG	12.5	0.66	495	7,200	16x6	Y
P595WHG	12.5	0.66	495	7,200	9x8	W
RS585BHG	12.5	0.66	495	7,200	8x8	B
RS994BHG	12.5	0.66	495	7,200	8x6	B
P585	12.5	0.66	495	7,200	8x8	W
P989	12.5	0.66	495	8,100	8x8	B
P585YHG	12.5	0.66	495	7,200	8x8	Y
RS536BHG	12.5	0.71	600	3,600	16x3	B

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
P566WHG	12.5	0.71	600	7,200	16x6	W
RS566BHG	12.5	0.71	600	7,200	16x6	B
RS586BHG	12.5	0.71	600	7,200	8x8	B
P564BHG	12.5	0.51	400	9,000	16x6	B
P540	14.4	0.52	450	8,000	8x8	W
PB540	14.4	0.52	450	8,000	8x8	W
P540	14.4	0.52	450	7,800	11x8	W
P968	14.8	0.58	580	7,500	16x6	W
RS5000BHG	15.0	0.80	1050	2,200	16x3	B
RS5311BHG	15.0	0.88	930	2,200	16x3	B
RS5311BHG	15.0	0.88	930	4,400	16x6	B
P6350	15.5	0.44	420	9,900	16x6	W
P6350	15.5	0.44	420	9,900	8x8	W,Y
P6380	15.5	0.38	380	10,500	16x6	W
P7700	18.5	0.63	700	5,600	8x8	B

### POLYPROPYLENE STRAP UNEMBOSSED

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
P1122	5.0	0.37	120	20,000	8x8	CL
PB1122	5.0	0.37	120	20,000	8x8	CL
P2170	5.7	0.37	170	20,000	9x8	CL
P2170	5.7	0.37	170	20,000	8x6.75	CL
PB2170	5.7	0.37	170	20,000	8x6.75	CL
P2215	5.7	0.46	205	16,500	8x6.75	CL
PB2170	5.7	0.37	170	20,000	9x8	CL
P981	5.7	0.37	170	20,000	8x8	CL
PB981	5.7	0.37	170	20,000	8x8	CL
PB2216	6.0	0.41	215	15,500	8x6.75	CL
PB2216	6.0	0.41	215	15,500	9x8	CL
P3600	10.5	0.63	525	8,000	16x6	B
P978	10.5	0.63	525	9,000	16x6	B




## Personalize Your Strap!

Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or even for product security and more.

## CONTROLLED ELONGATION POLYPROPYLENE

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
X3500	9.8	0.77	525	8,200	9x8	B
XB3540	10.5	0.75	500	8,250	16x6	W
XB4630	11.0	0.78	630	10,500	16x8 XL	W
X4525	11.3	0.72	525	8,000	9x8	W
XB5600	11.6	0.70	600	8,000	16x6	W
XB5600	11.6	0.70	600	10,500	16x8 XL	W
XB5620	11.6	0.70	620	8,000	16x6	W
XB5620	11.6	0.70	620	10,000	16x8 XL	W
X5650	11.6	0.74	650	7,000	16x6	BL,Y,W,G
XB5650	11.6	0.74	650	7,000	16x6	G,W,Y
XB5650	11.6	0.74	650	10,000	16x8 XL	W,S
XB5420	12.0	0.52	420	10,900	9x8	W
X5450	12.0	0.52	475	9,200	16x6	B,W
XB5450	12.0	0.52	475	9,200	16x6	B
XB5450	12.0	0.52	475	13,000	16x8 XL	W
X5450	12.0	0.52	475	10,900	9x8	B,W
X5500	12.0	0.56	525	8,370	16x6	B, W
XB5500	12.0	0.56	525	8,370	16x6	B, W
XB5500	12.0	0.56	525	9,900	9x8	B, W,Y
X5500	12.0	0.56	525	9,900	9x8	B, W,Y
X5525WQ	12.0	0.56	525	9,900	9x8	W
X5575	12.0	0.67	600	9,500	24x6	B
X5575	12.0	0.67	600	7,000	16x6	BL, B, W, Y
X972	12.0	0.67	600	7,910	16x6	G,S,W,Y
XB972	12.0	0.67	600	7,910	16x6	W
X5575	12.0	0.67	600	8,258	9x8	B,G,W
XB5575	12.0	0.67	600	8,258	9x8	B,G,W
X5725	12.0	0.78	725	6,100	16x6	B, G, W, Y
XB5725	12.0	0.78	725	6,100	16x6	CL
XB5725	12.0	0.78	725	9,530	16x8 XL	W
XB982	12.0	0.78	725	10,000	16x8 XL	W
X5725	12.0	0.78	725	7,100	9x8	B, W
X5725	12.0	0.78	725	8,200	8x8	Y
XB5725	12.0	0.78	725	8,200	8x8	Y
XB5630	13.5	0.65	630	9,300	16x8 XL	W,B
X6575	14.8	0.61	590	7,200	16x6	W
XB6575	14.8	0.61	590	7,200	16x6	W
X6650	14.8	0.62	650	6,500	16x6	W
XB6650	14.8	0.62	650	6,500	16x6	W
XB6650	14.8	0.62	650	8,600	16x8 XL	W
X6650	14.8	0.62	650	6,500	9x8	B
XB6650	14.8	0.62	650	6,500	9x8	G
XB6900	15.0	0.82	900	7,800	16x8 XL	B
X6700	15.5	0.73	725	6,000	16x6	Y,W
X6700	15.5	0.73	725	6,000	9x8	Y
X7950	18.2	0.80	1050	4,500	8x8	B

## CONTROLLED ELONGATION - ULTRABAND

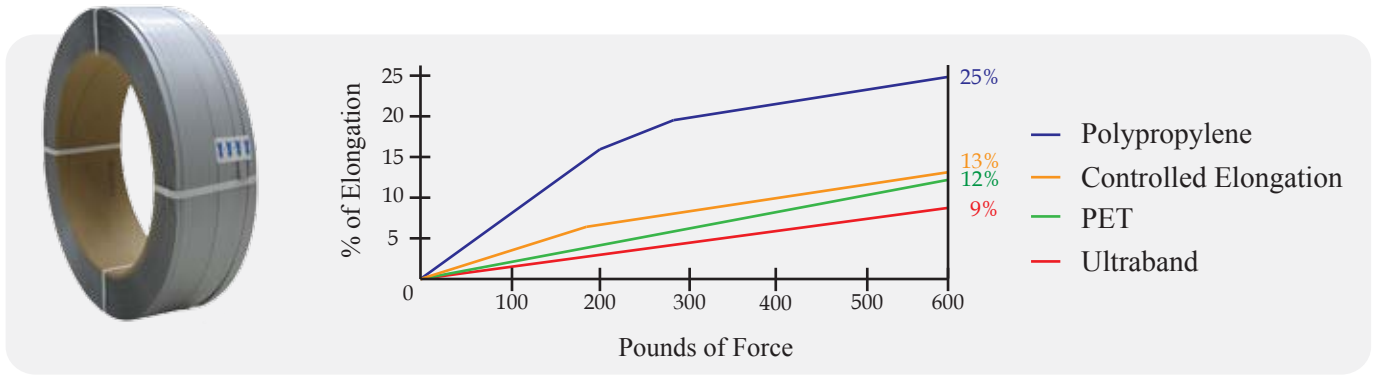

This graph illustrates the differences that exist between polypropylene, controlled elongation, Ultraband and polyester strapping.

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
U3700	10.5	0.95	700	6,400	16x6	G
U5600	12.0	0.72	600	7,500	16x6	B,G,W
U5600	12.0	0.72	600	3,750	16x3	B,G
U5600	12.0	0.72	600	10,000	24x6	G
UB5800	12.0	0.95	800	6,600	16x6	B
U5800	12.0	0.95	800	6,600	16x6	B,G,W
UB5800	12.0	0.95	800	3,300	16x3	G,B
U5800	12.0	0.95	800	3,300	16x3	G,B
U6900	15.0	0.88	1025	5,100	16x6	B,G,S,W
U6900	15.0	0.88	1025	2,550	16x3	B,S
U6910	15.0	1.04	1250	4,000	16x6	B,G,R,S
U6910	15.0	1.04	1250	2,000	16x3	G,S
U6132	15.0	1.07	1320	4,100	16x6	G
U7160	18.5	1.05	1600	3,300	16x6	G,S
UB7160	18.5	1.05	1600	4,300	16x8 XL	S
U7160	18.5	1.05	1600	1,650	16x3	G,S
U7990	18.5	0.80	1200	1,950	16x3	B,S
U7990	18.5	0.80	1200	3,900	16x6	B,S
U8195	25.2	1.00	1950	2,500	16x6	W

Please  Recycle

All Dynaric polypropylene strap is made with non-metallic prime resin



## POLYESTER STRAP

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
T475	9.2	0.55	475	9,600	16x6	B,G
T1616 HG	9.0	0.51	450	12,500	16x6	G
T1718	10.5	0.63	600	9,000	16x6	G
T1716HG	10.6	0.55	500	10,500	16x6	G
T1717	11.1	0.58	600	9,900	16x6	G
T1822-6GW	12.0	0.71	800	6,500	16x6	G
T610 +	12.5	0.51	610	7,202	16x6	B,G
T610 HG	12.5	0.51	610	3,603	16x3	B,G
T811+	12.3	0.66	775	5,800	16x6	B,G
T811 HG+	12.3	0.66	775	2,900	16x3	B
T587 HG	15.4	0.51	750	2,850	16x3	B
T901 HG	15.4	0.51	750	2,900	16x3	B
T589 HG+	15.4	0.60	880	4,400	16x6	B,G
T589 HG+	15.4	0.60	880	2,200	16x3	B,G
T5812 HG	15.7	0.79	1200	3,600	16x6	B,G
T5812 HG	15.7	0.79	1200	1,800	16x3	B,G
T5813 HG+	15.7	0.84	1250	5,000	16x6	G
T5814 HG+	15.7	0.86	1400	4,000	16x6	G
T5814 AAR	15.7	0.86	1400	4,000	16x6	G
T2260 AAR	15.5	0.90	1400	4,000	16x6	G
T5816 AAR	15.7	1.04	1600	4,000	16x6	G
T2270 AAR	15.5	1.00	1600	4,000	16x6	G
T3440	19.0	1.06	1950	3,000	16x6	G
T3450	19.2	1.27	2000	2,800	16x6	G

## EMBOSSED POLYESTER STRAP

Product	Width (mm)	Gauge (mm)	Tensile (lbs.)	Footage	Core (in)	Color
T450E	9.2	0.55	450	10,500	16X6	G
T525-6E	12.0	0.47	475	10,500	16X6	B,G
T610E+	12.5	0.59	610	7,202	16X6	B,G
T811E	12.5	0.75	775	5,800	16X6	G

B-Black    BL-Blue    CL-Clear    G-Green    OR-Orange    P-Purple    R-Red    S-Silver    W-White    Y-Yellow



**Corporate Office**  
5740 Bayside Road  
Virginia Beach, VA 23455

**Extrusion Division**  
5925 Thurston Ave  
Virginia Beach, VA 23455

*Certified Minority Owned Business*

Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: [order@dynaric.com](mailto:order@dynaric.com) | Web: [www.dynaric.com](http://www.dynaric.com)