


Dynaric OR-T 400

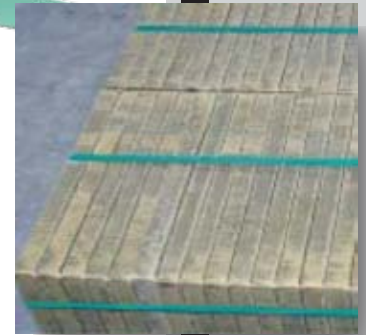

Strapping made easy !
with only one push of a button •

Perfect solution for **all plastic**
strapping applications

Easy • Fast • Safe • Economic • Environmentally-friendly

Dynaric, Inc.



Certified Minority Owned Company Since 1999

Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com

Easy

- Depending on application, adjustable operation mode
- Fully automatic
- Semi-automatic
- Manual
- Soft



Fast

Regardless of package, size, vertical or horizontal strapping:

- Fully or semi-automatic tensioning, welding, and strap cutting – with only one push of a button

Safe

For multiple strapping or for the same types of goods:

- Consistent strapping
- Automatic strapping eliminates operator error

Strapping with PP strap or for fragile packages:

- “Soft” mode

Economic

- Energy-efficient strapping system
- More cycles per battery charge
- Cost efficient
- Service-friendly construction
- High quality

Environmental-friendly

Latest brushless motor engineering with the latest environmental-friendly battery technology from Bosch:

- High efficiency ratio
- No memory effect
- Recharging at any time
- High number of strappings

Weight 9.3 lbs (4.2 kg)*

Dimensions

Length	13.15 in (334 mm)
Width	5.4 in (138 mm)
Height	5.8 in (148 mm)

Tensioning force

Standard Mode	264-882 lbs. (1200–4000 N)
Soft Mode	88-353 lbs. (400–1600 N)

Tensioning speed 7.87 in/s (220 mm/s)

Sealing Friction weld

Battery, Battery charger

Charger voltage 100, 110, 230 V

Battery charging time 20–45 minutes

Tension cycles per battery up to 300

Battery Li-Ion 14.4 V, 2.6 Ah

Plastic strap

Type	Polypropylene (PP) and Polyester (PET)	
Width	15–16, 18–19 mm	
Thickness	PP	0.8–1.0 mm
	PET	0.8–1.3 mm

*Including Battery



Tool options

- Suspension bow
- Protection plate
- Protection cover
- Power supply

Dynaric, Inc.

