

Dynaric

# D3300A

## High Speed Fully Automatic Bottom Seal Strapping Machine

Reliable High Speed  
Strapping Machine  
Designed to  
Increase Overall  
Production  
in Virtually any  
Packaging  
Environment



*Cost Saving  
Labor Reduction*




Certified Minority Owned Business

Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: [order@dynaric.com](mailto:order@dynaric.com) | Web: [www.dynaric.com](http://www.dynaric.com)

# Dynaric D3300A

Connect with us

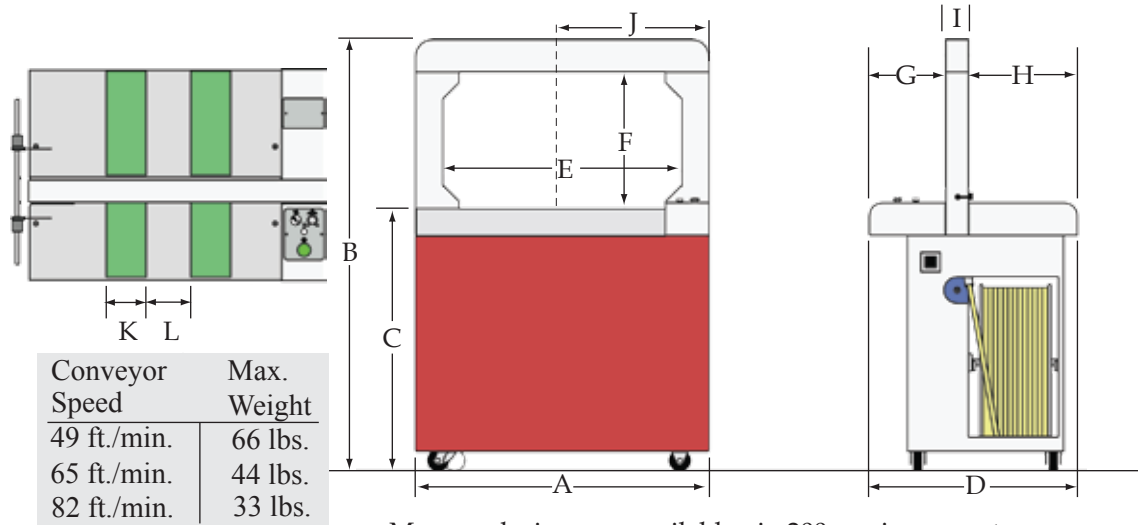

Many arch sizes are available - in 200mm increments

| Conveyor Speed | Max. Weight |
|----------------|-------------|
| 49 ft./min.    | 66 lbs.     |
| 65 ft./min.    | 44 lbs.     |
| 82 ft./min.    | 33 lbs.     |

|   |                 |
|---|-----------------|
| A | 35.3" (898mm)   |
| B | 52.1" (1323mm)  |
| C | 31.4" (800mm)   |
| D | 24.9" (634mm)   |
| E | 28.7" (730mm)   |
| F | 16.4" (418mm)   |
| G | 9.17" (233mm)   |
| H | 13.1" (333mm)   |
| I | 2.71" (69mm)    |
| J | 17.5" (444.5mm) |
| K | 4.7" (120mm)    |
| L | 5.4" (136mm)    |

## At A Glance

- Newly designed arch offers quieter and more reliable operation.
- Compact, lightweight assembly for easy mobility throughout your facility
- Compact, low maintenance sealer head
- Internal strap dispenser minimizes required floor space
- Stainless steel tensioning roller
- Cycle time capable of 50 straps per minute
- Loop kick-out feature eliminates strap jams
- Faster warm-up time reduces production delays
- Easily accessible strap feed unit for trouble free automatic strap feeding
- Open coil cabinet permits visibility of internal strap coil
- Automatic strap discharge mechanism removes any leftover strap when strap coil is finished and in case of a misfeed
- External adjustment of strap tension by the simple turn of a dial

|                            |   |
|----------------------------|---|
| <b>Overall Width:</b>      | 24.9" (634mm)   |
| <b>Overall Length:</b>     | 35.3" (898mm)   |
| <b>Overall Height:</b>     | 52.1" (1323mm)  |
| <b>Weight:</b>             | 386 lbs (175 kg)  |
| <b>Cycle Time:</b>         | 1.2 seconds   |
| <b>Cycle Initiation:</b>   | Photo Eye or Push Button                                  |
| <b>Strap Size:</b>         | 3/8 & 1/2" (9mm & 12mm)                                   |
| <b>Sealing Method:</b>     | Heat Seal   |
| <b>Package Size:</b>       | Min. 1.5" H x 3.5" W<br>Max. Governed By Arch             |
| <b>Tension:</b>            | Externally located,<br>adjustable 6.6 - 154 lbs.          |
| <b>Seal Head Location:</b> | Bottom: 17.5" (444.5mm)<br>from right side of the machine |
| <b>Power:</b>              | 230 Volt AC (460 Volt AC)                                 |
| <b>Mobility:</b>           | 2 swivel and 2 fixed casters                              |
| <b>Dispenser:</b>          | Internally located -<br>8" or 9" I.D./8" Face/18" O.D.    |

Dynaric, Inc.



Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com

Certified Minority Owned Business