

Dynaric

DF117S

# Automatic, Stainless Steel Side Seal Strapping Machine

Designed for  
Demanding Packaging  
Environments  
of the **Meat, Poultry,  
Agricultural and  
Seafood Industry**



**Increase Production - Reduce Cost**



Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or even for product security and more.



**Dynaric, Inc.**



Phone: (800)526-0827 | Fax: (757)363-8016 | E-mail: [order@dynaric.com](mailto:order@dynaric.com) | Web: [www.dynaric.com](http://www.dynaric.com)

*Certified Minority Owned Business*

# Dynaric DF117S




The DF117S utilizes a side seal design while incorporating a stainless steel cabinet and corrosion resistant parts to provide maximum protection in the harsh environments of the seafood,

meat and poultry packing industries. Ideal for low conveyor applications, the DF117S's side seal design is uniquely suited for strapping applications where a bottom seal is not practical or recommended. The DF117S can be integrated into an existing conveyor system, minimizing the need for hand strapping and eliminating unnecessary package handling. The DF117S is a proven performer known for its cost reduction, labor saving capabilities. The DF117S offers a cycle time of 1.6 seconds (depending on arch/package size), strapping up to 37 packages per minute while maintaining a dramatic reduction in machine downtime and required maintenance.

## *At A Glance*

- **Anti-jam** feature eliminates strap jams in unit
- **Internal dispenser** minimizes required floor space and keeps strap dry
- Available in 220 volts, 3-phase or optional 440 volt, 3-phase
- **Electronic control pad** allows the operator to easily adjust timer functions, heater temperature setting and seal time
- **Digital display** reflects the unit's operational status, including an error read-out for easy troubleshooting
- **Easy strap feeding** and adjustable external tension control and heat seal allows operators to strap packages in easy, efficient manner
- **Easily adjustable table height** for a variety of conveyor configurations
- **Energy saving** feature; motor automatically shuts down when machine is not in use
- **Heavy-Duty casters** allow for the machine to be easily moved throughout your facility
- Available for use with 3/8" or 1/2" plastic strapping

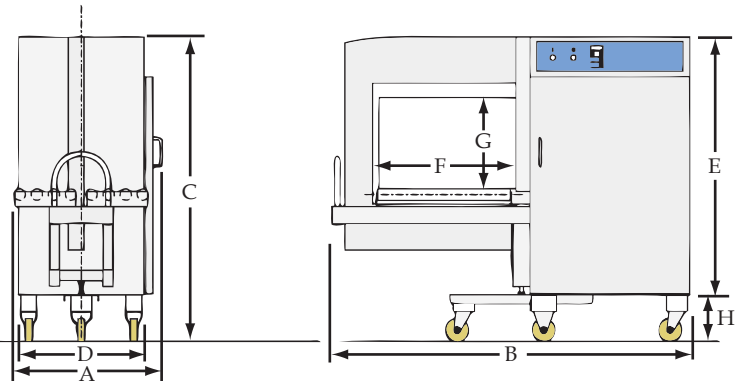

A	25.6" (650mm)	E	44.4" (1130mm)
B	65.7" (1670mm)	F	27.5" (700mm)
C	52.5" (1335mm)	G	15.7" (400mm)
D	21.6" (550mm)	H	8.07" (205mm)

**Table Height:** 26.3"- 28.7" (670mm - 730mm)

**Weight:** 506 lbs (230 kg)

**Cycle Time:** 1.6 seconds

**Cycle Initiation:** Foot Switch or Push Button

**Strap Size:** 3/8" & 1/2" (9mm & 12mm)

**Dispenser:** Internally located  
9" I.D./8" Face/ 18"O.D.

**Package Size:** Min. 1.2" H x 1.6" W  
Max. Governed By Arch

**Tension:** Internally located  
Adjustable 10 - 250 lbs.

**Seal Head Location:** Side: 30.3" (700mm)

**Sealing Method:** Heat Seal

**Mobility:** 3 swivel and 2 fixed casters

**Power:** 220V, 3 phase, 60Hz  
or 440V, 3 phase, 60Hz

*Certified Minority Owned Business*

Phone: (800)526-0827 | Fax: (757)363-8016 | E-mail: [order@dynaric.com](mailto:order@dynaric.com) | Web: [www.dynaric.com](http://www.dynaric.com)

