



Dynaric, Inc.

AM659C

High Speed Automatic Strapping Machine

Designed To
Secure Trim
Moldings,
Wooden
Dowels, PVC
Pipe, and Steel
Rods



- ▶ Performance
- ▶ Reliability
- ▶ User Friendly

Dynaric, Inc.

Subsidiary of Polychem LLC

▶ Phone: (800)526-0827 ▶ Fax: (757)363-8016 ▶ E-mail: order@dynaric.com ▶ Web: www.dynaric.com




Making Your Strapping Job Easier

The AM659C is a high speed automatic heat seal strapping machine that utilizes a smaller sealing blade and press to tightly secure small round products and irregular shaped objects. It is capable of applying up to 50 straps/minute to a wide range of sizes and types of packages.

The AM659C can operate with 9mm and 12mm strap widths. Because of its ability to use many sizes of strap, the AM659C enables the customer to choose the least expensive strap for their package.

The AM659C has many features that include automatic coil feed system, strap loop ejector, short feed detector, refeed system and foot bar cycle activation pedal. These standard features alone increase strapping performance and reliability, as well as providing ease of operation for the equipment operator.

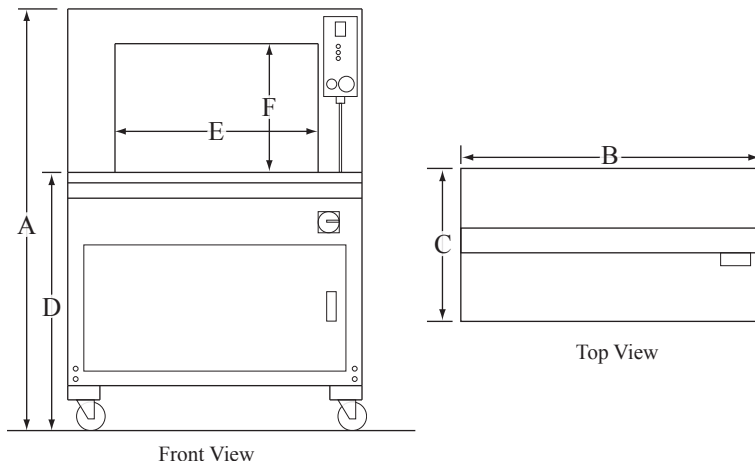

A	52.2" (1327mm)
B	36.7" (933mm)
C	22.7" (577mm)
D	31.5" (800mm)
E	25.5" (650mm)
F	15.4" (400mm)

At A Glance

- Servo motors for precise performance and elimination of belts, clutches and pulleys.
- Wide range electronic tension control
- Adjustable strap heat seal dwell time for optimum seal joint efficiency
- Applies 50 straps/minute
- Automatic coil feed system for ease of start up
- End of strap sensor and strap loop ejector
- Strap re-feed system in case of a short feed
- Standard foot bar pedal activator and start cycle push button
- Standard arch sizes available 650mm wide x 400mm high and 650mm x 600mm high

Specifications

Cycle Time:	50 Straps per minute
Tension Range:	2.2-121 lbs.
Strap Width:	Standard: 9mm or 12mm
Sealing Method:	Heating Element
Reel Inside Diameter:	200, 230, 280 mm (specified)
Power Supply:	110/220/230/240V,50/60Hz,1PH
Power Consumption:	0.5 kw
Standard Arch Size:	W 650 x H 400 mm
Table Height:	800mm
Layout Dimension:	L 933 x W 577 x H 1327 mm
Machine Weight:	573 lbs.

Personalize Your Packages



Personalize your plastic strapping. Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or for product security and more.

