


Dynaric, Inc.

DF11C

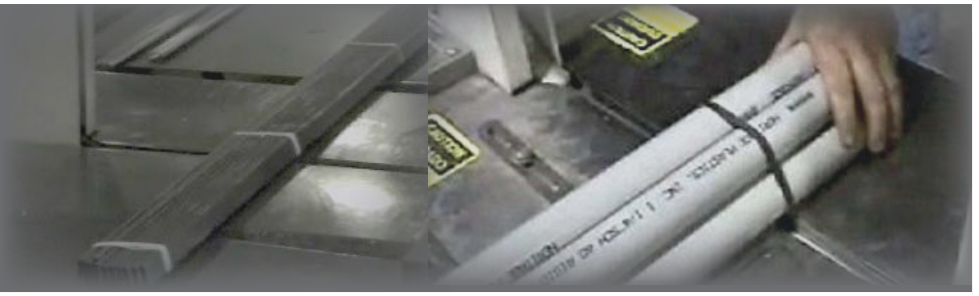

*Designed with a small,
compact sealing head*

The ability to do
what most other
machines are unable
to do - tightly secure
small packages and
irregularly shaped
items

Trim Moldings,
Wooden Dowels,
PVC Pipe, and Steel
Rods



Cost Reduction - Labor Savings

Dynaric, Inc.



Certified Minority Owned Business


Phone: (800) 526-0827 | E-mail: order@dynaric.com | Web: www.dynaric.com

Dynaric, Inc DF11C

Connect with us



The DF11C is a specialized machine designed to produce a tight bundle around items as small as 1.6" wide. Engineered with a narrow sealing head the DF11C can strap rigid material such as steel bars as well as cylindrical products like PVC tubing, metal pipes, and even fence posts while maintaining strap tension. The arch configuration and tensioning system are designed to minimize the strapping path and reduce machine wear while increasing cycle speed and efficiency.

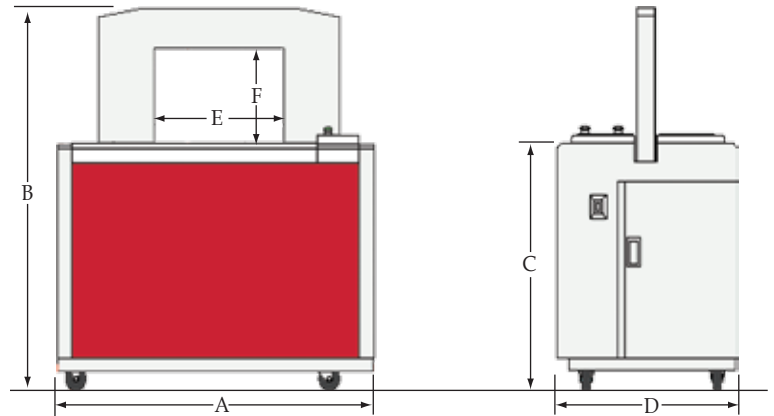

A	44.7" (1135 mm)	D	25.6" (650 mm)
B	52.9" (1345 mm)	E	19.7" (500 mm)
C	31.3" (795 mm)	F	15.75" (400 mm)

At A Glance

- Ideal for strapping packages as small as 1.6" wide x 1.2" high
- Anti-jamming feature eliminates downtime caused by strap jams
- Easy automatic strap feeding
- Internal dispenser minimizes required floor space
- Operates on 120V single phase power, enabling it to be used in any location
- Equipped with a control pad that easily adjusts timer functions, heater temperature setting and seal time
- Digital display reflects the operational status, including an error code read out
- Easily adjustable stepless tension control
- Motor automatically shuts down when not in use
- Heavy duty casters for portability
- Accepts 3/8" strapping standard or 1/2" strapping as an option
- Table tops are a 1.5mm thick smooth stainless steel plate, without rollers

Overall Width:	25.6" (650 mm)
Overall Length:	44.7" (1135 mm)
Overall Height:	52.9" (1345 mm)
Table Height:	31.3" (795 mm)
Weight:	410 lbs (186 kg)
Cycle Time:	1.6 seconds
Cycle Initiation:	Palm switch or foot switch
Sealing Method:	Heat seal
Strap Size:	3/8" & 1/2" (9 mm & 12 mm)
Package Size:	Min. 1.6" W x 1.2" H Max. Governed by arch
Tension:	Low tension; 40mm stroke, stepless variety
Seal Head Location:	Bottom
Mobility:	2.6" casters
Dispenser:	Internally located - 9" I.D./8" Face/18" O.D.
Power:	120V, single phase Optional: 220V, 3 phase, 60Hz or 440V, 3 phase, 60Hz

Personalize Your Packages



Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or for product security and more.



Dynaric, Inc.



Scan to join our mailing list and receive special offers

Certified Minority Owned Business

Phone: (800) 526-0827 | E-mail: order@dynaric.com | Web: www.dynaric.com