

Dynaric D3300

High Speed Automatic Bottom Seal Strapping Machine

Reliable High Speed
Strapping Machine
Designed to
Increase Overall
Production
in Virtually any
Packaging
Environment



*Cost Saving
Labor Reduction*

Dynaric, Inc.




Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com

Certified Minority Owned Business

Dynaric D3300

Connect with us

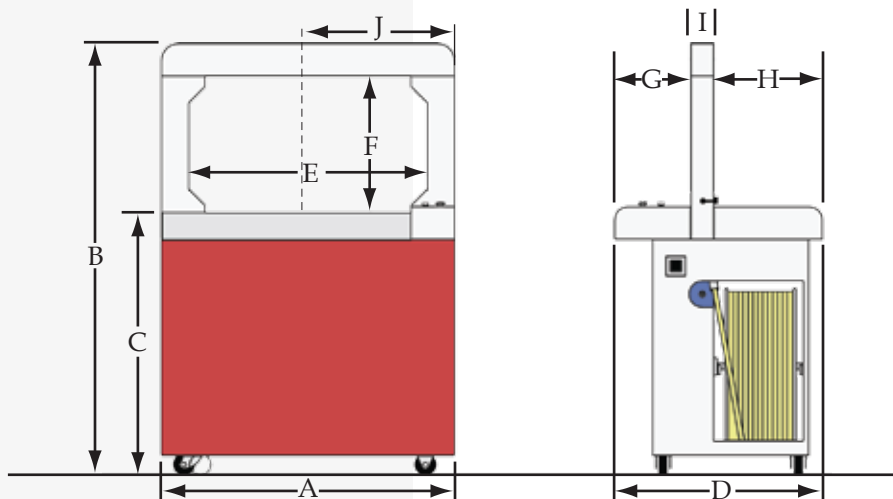

A	35.3" (898mm)
B	52.1" (1323mm)
C	31.4" (800mm)
D	24.9" (634mm)
E	28.7" (730mm)
F	16.4" (418mm)
G	9.17" (233mm)
H	13.1" (333mm)
I	2.71" (69mm)
J	17.5" (444.5mm)

At A Glance

- Newly designed arch offers quieter and more reliable operation.
- Compact, lightweight assembly for easy mobility throughout your facility
- Compact, low maintenance sealer head
- Internal strap dispenser minimizes required floor space
- Stainless steel tensioning roller
- Cycle time capable of 50 straps per minute
- Loop kick-out feature eliminates strap jams
- Faster warm-up time reduces production delays
- Easily accessible strap feed unit for trouble free automatic strap feeding
- Open coil cabinet permits visibility of internal strap coil
- Automatic strap discharge mechanism removes any leftover strap when strap coil is finished and in case of a misfeed
- External adjustment of strap tension by the simple turn of a dial

Overall Width:	24.9" (634mm)
Overall Length:	35.3" (898mm)
Overall Height:	52.1" (1323mm)
Weight:	308 lbs (140 kg)
Cycle Time:	1.2 seconds
Cycle Initiation:	Foot Switch or Push Button
Strap Size:	3/8" & 1/2" (9mm & 12mm)
Sealing Method:	Heat Seal
Package Size:	Min. 1.5" H x 3.5" W Max. Governed By Arch
Tension:	Externally located, adjustable 6.6 - 154 lbs.
Seal Head Location:	Bottom: 17.5" (444.5mm) from right side of the machine
Power:	120 Volt Single Phase
Mobility:	2 swivel and 2 fixed casters
Dispenser:	Internally located - 8" or 9" I.D./8" Face/18" O.D.

Dynaric, Inc.



Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com

Certified Minority Owned Business