

Dynaric, Inc.

DF-11A

Fully Automatic Bottom Seal Strapping Machine

Built around a rugged frame with heavy-duty components the DF-11A has proven to be a “*Workhorse*” in many industries!



Cost Reduction, Labor Saving



Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or even for product security and more.



Dynaric, Inc.



Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com

Certified Minority Owned Business

Minimizing the need for hand strapping and unnecessary package handling.

The DF-11A fully automatic strapping machine can be integrated into an existing conveyor system to automate your carton sealing process.



With Optional Compression


The DF-11A is a proven performer known for its cost reduction, labor saving capabilities. With a cycle time of 1.6 seconds*, the DF11A applies up to 37 straps per minute while maintaining a dramatic reduction in machine downtime and required maintenance. The heavy duty design of the DF11A allows us to customize the strapping machine to better serve your strapping requirements

At A Glance

- Anti-jam feature eliminates strap jams in unit
- Internal dispenser; minimizes required floor space
- Available in 220 volts, 3-phase or 440 volt, 3-phase (optional)
- Electronic control pads allows the operator to easily adjust timer functions, heater temperature setting and seal time
- Digital display reflects the units operational status, including an error read-out for easy troubleshooting
- Easy strap feeding and adjustable external tension control and heat seal allows operators to strap packages in easy, efficient manner
- Adjustable photo eyes allows you to automatically strap virtually any package size
- Energy saving feature; motor automatically shuts down when machine is not in use
- Heavy-Duty casters allow for the machine to be easily moved throughout your facility
- Available for use with 3/8" or 1/2" strap ping



Scan to join our mailing list and receive special offers

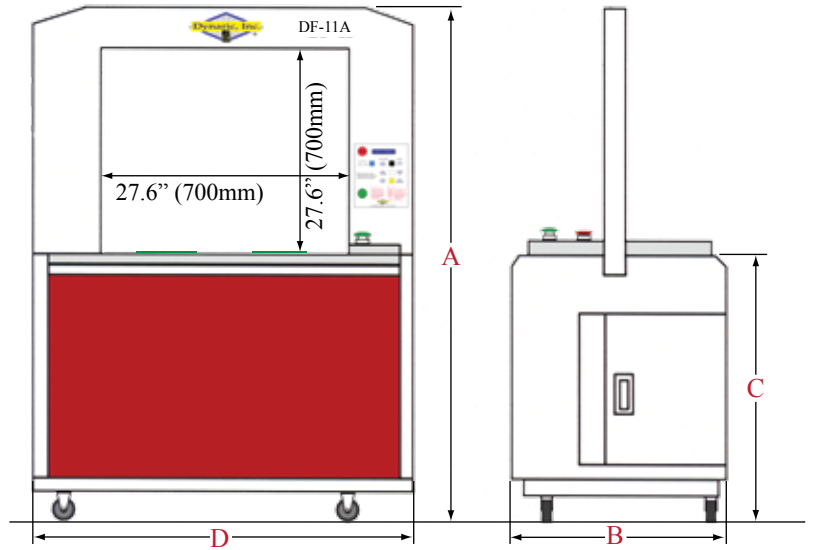

Arch sizes are available in 8" (200mm) increments

Overall Width:	B 25.6" (650mm)
Overall Length:	D 44.7" (1135mm)**
Overall Height:	A 60.8" (1544mm)**
Table Height:	C 31.3" (795mm)
Machine Weight:	445 lbs (201 kg.):**
Sealing Method:	Heat Seal
Sealing Head Location:	Bottom
Power Supply:	220V, 3 - phase (440V 3 phase optional)
Cycle Time:	1.6 seconds*
Cycle Initiation:	Manual Mode: Push Button Automatic Mode: Photo-eye
Tension:	Adjustable external control; 10-250 lbs
Minimum Package Size:	Depending on arch size
Maximum Package Size:	Depending on arch size
Mobility:	2.6" casters
Strap Width:	3/8" or 1/2"
Dispenser:	Internally located 9" I.D. / 8" Face / 18" O.D.

* Dependent on arch size and package size

** Dependent on arch size

