

Dynaric, Inc.

ST1SS

Fully Automatic High Speed Stainless Steel Strapping Machine

Reliable, Durable
Strapping Machine
Designed for the Harsh
Packaging
Environments of the
Meat, Poultry,
Seafood and
Agricultural
Industries



Increase Production - Reduce Cost



**XL
Coils**

Increase your production further by reducing downtime caused by changing coils. Dynaric's XL coils are still produced using the same high quality materials as our standard coils but with more footage therefore eliminating up to 30% of your coil changes.

Dynaric, Inc.



Phone: (800) 526-0827 Fax: (757) 363-8016 E-mail: order@dynaric.com Web: www.dynaric.com

Certified Minority Owned Business

Dynaric, Inc.

ST1SS

Connect with us



Fully Automatic High Tension Stainless Steel Strapping Machine



At A Glance

- Fully-automatic strapping machine with variable speed table belt conveyor, photo eyes and up/down stream interlocks
- High speed through put of up to 45 cycles per minute
- Can apply single, double or multiple straps per package
- “Jam Free” technology
- Operator friendly control panel
- Easy automatic strap feed and refeed
- Strap end sensing system
- Unique XL strap coil system
- External coil for ease of coil change
- Quick release strap dispenser to minimize down time during coil changes
- Cost efficient strap sizes: 5mm, 6mm, 8mm & 9mm
- Stainless steel cabinet with bottom splash guard
- Stainless steel and corrosion resistant components
- Equipped for cold temperature environment

- **Optional** single platen compression bar to assist with package closure and conditioning



- **Optional** package stops ensure precise strap placement

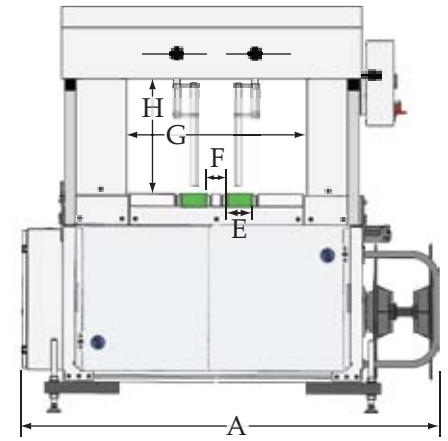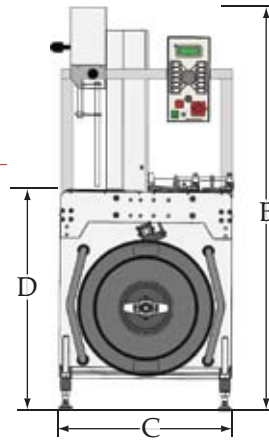

A	59.5" (1511.5mm)
B	63.6" (1617mm)
C	23.9" (608mm)
D	32.8" (834mm)

E	3.3" (84mm)
F	2.4" (62mm)
G	24.6" (626mm)
H	22.0" (560mm)

*Arch height if optional bundle stops are installed
**Arch height if optional press is installed

	17.5" (445mm)*
	16.1" (410mm)**

Overall Width:	23.9" (608 mm)
Overall Length:	59.5" (1511 mm)
Overall Height:	63.6" (1617mm)
Table Height:	32.8" (834mm)
Weight:	825 lbs (374 kg)
Cycle Time:	45 cycles / min.
Cycle Initiation:	Push Button (Manual Mode) Photoeye (Automatic Mode)
Strap Size:	5mm - 9mm
Package Size:	Max. Governed By Arch Min. 3.9" W x .39" H
Tension:	Ultrasonic package sensing system with stepless adjustment of tension force
Seal Head Location:	Bottom
Sealing Method:	Heat Seal
Mobility:	2 swivel and 2 fixed casters
Dispenser:	Externally located - 8" or 9" I.D./8" or 9" Face/18" O.D.
Power:	220 or 440 Volt 3 Phase***

*** Must be specified at the time of order

Dynaric, Inc.



Phone: (800) 526-0827 Fax: (757) 363-8016 E-mail: order@dynaric.com Web: www.dynaric.com

Certified Minority Owned Business