

# AM659S

## High Speed Stainless Steel Automatic Strapping Machine

Designed for the Harsh  
Packaging Environments  
of the Meat, Poultry and  
Seafood Industries



- ▶ Performance
- ▶ Reliability
- ▶ User Friendly

**Dynaric, Inc.**

Certified Minority Owned Business

▶ Phone: (800)526-0827 ▶ Fax: (757)363-8016 ▶ E-mail: [order@dynaric.com](mailto:order@dynaric.com) ▶ Web: [www.dynaric.com](http://www.dynaric.com)




# Dynaric, Inc.

## AM659S

Connect with us



The AM659S Stainless Steel Strapping Machine is a high speed automatic heat sealing strapping machine that is designed for the demanding environments such as the Meat, Poultry and Seafood Industries. Designed with ease of operation in mind, the AM659S is equipped with a multi-function control pad, easy access E-Stop, table top switch and an external dispenser for easy access. The AM659S designed to run 9mm to 12mm Dynaric polypropylene strap and is capable of applying up to 50 straps/minute. Able to use such a wide range of Dynaric plastic strap, the AM659S allows the customer to choose the perfect strap for their application and budget. The AM659S has many standard features that include automatic coil feed system, strap loop ejector, short feed detector, refeed system and table top cycle activation switch. These standard features combined with machine reliability and strapping performance provide ease of operation for the equipment operator.

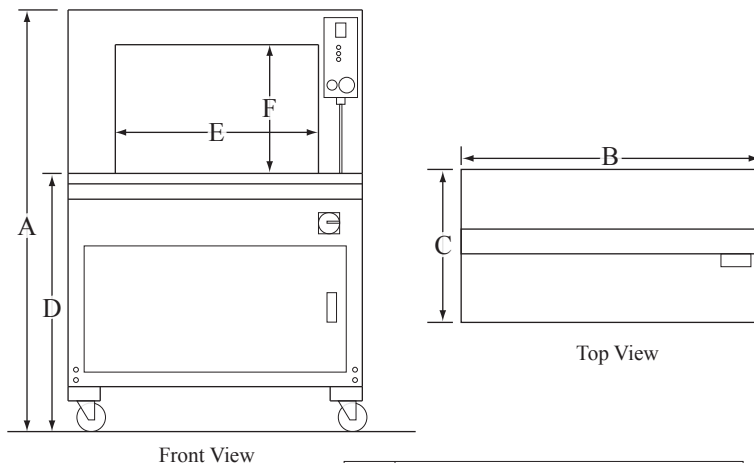

A	52.2" (1327mm)
B	36.7" (933mm)
C	22.7" (577mm)
D	31.5" (800mm)
E	25.5" (650mm)
F	15.4" (400mm)

### At A Glance

- Servo motors for precise performance and elimination of belts, clutches and pulleys.
- Wide range electronic tension control
- Adjustable strap heat seal dwell time for optimum seal joint efficiency
- Applies 50 straps/minute
- Automatic coil feed system for ease of start up
- End of strap sensor and strap loop ejector
- Strap re-feed system in case of a short feed
- Standard foot bar pedal activator and start cycle push button
- Standard arch sizes available 650mm wide x 400mm high and 650mm x 600mm high

### Specifications

<b>Cycle Time:</b>	50 straps per minute
<b>Tension Range:</b>	2.2-121 lbs.
<b>Strap Width:</b>	Standard: 9mm or 12mm
<b>Sealing Method:</b>	Heating Element
<b>Reel Inside Diameter:</b>	200, 230, 280 mm (specified)
<b>Power Supply:</b>	110/220/230/240V,50/60Hz,1PH
<b>Power Consumption:</b>	0.5 kw
<b>Standard Arch Size:</b>	W 650 x H 400 mm
<b>Table Height:</b>	800mm
<b>Layout Dimension:</b>	L 933 x W 577 x H 1327 mm
<b>Machine Weight:</b>	573 lbs.

### Personalize Your Packages



Personalize your plastic strapping. Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or for product security and more.



Certified Minority Owned Business

▶ Phone: (800)526-0827 ▶ Fax: (757)363-8016 ▶ E-mail: [order@dynaric.com](mailto:order@dynaric.com) ▶ Web: [www.dynaric.com](http://www.dynaric.com)