

Dynaric, Inc.

# AM659Y



▶ Performance

▶ Reliability

▶ User Friendly

**Dynaric, Inc.**



Certified Minority Owned Company

Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: [order@dynaric.com](mailto:order@dynaric.com) | Web: [www.dynaric.com](http://www.dynaric.com)

# Dynaric, Inc.


## AM659Y



**Making Your Strapping Job Easier** The AM659Y is a high speed side seal automatic strapping machine that is designed for ease of operation by equipment operators. It is capable of applying up to 50 straps/minute to a wide range of sizes and types of packages.

The AM659Y can operate with 9mm and 12mm strap widths. Because of its ability to use many sizes of strap, and its electronic tension control, it enables the customer to choose the least expensive strap for their package.

The AM659Y has many standard features that include automatic coil feed system, strap loop ejector, short feed detector, refeed system and foot bar cycle activation pedal. These special user friendly features combine to increase strapping performance and reliability, as well as providing ease of operation for the equipment operator.

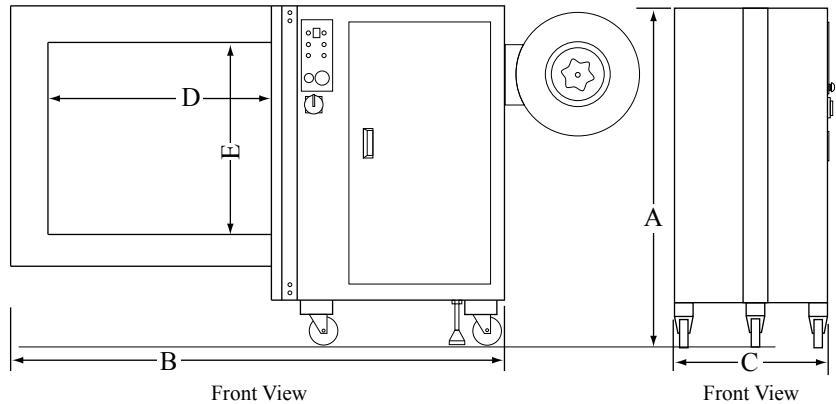

		Available Arch Sizes			
	Width	600mm	800mm	1000mm	1200mm
Height	650mm	✓	✓		
850mm	✓	✓	✓	✓	
1050mm	✓	✓	✓	✓	
1250mm			✓	✓	

A	41.3" (1050mm)
B	53.1" (1350mm)
C	22.8" (580mm)
D	31.5" (800mm)
E	25.5" (650mm)

### At A Glance

- Servo motors for precise performance and elimination of belts, clutches and pulleys.
- Wide range electronic tension control
- Adjustable strap heat seal/dwell time for optimum seal joint efficiency
- Applies 50 straps/minute
- Automatic coil feed system for ease of start up
- End of strap sensor and strap loop ejector
- Strap re-feed system in case of a short feed
- Standard foot bar pedal activator and start cycle push button
- Standard arch sizes available 800mm wide x 650mm high

### Specifications

<b>Cycle Time:</b>	50 straps per minute
<b>Tension Range:</b>	2.2-121 lbs.
<b>Strap Width:</b>	Standard: 9mm or 12mm
<b>Sealing Method:</b>	Heating Element
<b>Reel Inside Diameter:</b>	200, 230, 280mm (specified)
<b>Power Supply:</b>	110/220/230/240V,50/60Hz,1PH
<b>Power Consumption:</b>	0.5 kw
<b>Standard Arch Size:</b>	W 800 x H 650mm
<b>Slide Table Height:</b>	695mm
<b>Layout Dimension:</b>	L 933 x W 577 x H 1327mm
<b>Machine Weight:</b>	573 lbs.

### Personalize Your Packages



Personalize your plastic strapping. Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or for product security and more.



Scan to receive our newsletters



Certified Minority Owned Business

▶ Phone: (800)526-0827 ▶ Fax: (757)363-8016 ▶ E-mail: order@dynaric.com ▶ Web: www.dynaric.com