

Dynaric DF117S

Automatic, Stainless Steel Side Seal Strapping Machine

Designed for
Demanding Packaging
Environments
of the **Meat, Poultry,**
Agricultural and
Seafood Industry



Increase Production - Reduce Cost

Think Before You Print!



5740 Bayside Road, Virginia Beach, VA 23455

Phone: (800) 526-0827 Fax: (757) 363-8016

E-mail: gd@dynaric.com


Web address: www.dynaric.com

Dynaric DF117S

The DF117S utilizes a side seal design while incorporating a stainless steel cabinet and corrosion resistant parts to provide maximum protection in the harsh environments of the seafood, meat and poultry packing industries. Ideal for low conveyor applications the DF117S's side seal design is uniquely suited for strapping applications where a bottom seal is not practical or recommended.

The DF117S can be integrated into an existing conveyor system, minimizing the need for hand strapping and eliminating unnecessary package handling. The DF117S is a proven performer known for its cost reduction, labor saving capabilities. The DF117S offers a cycle time of 1.6 seconds (depending on arch/package size), strapping up to 37 packages per minute while maintaining a dramatic reduction in machine downtime and required maintenance.

- Anti-jam feature eliminates strap jams in unit
- Internal dispenser; minimizes required floor space, keeps strap dry
- Available in 220 volts, 3-phase or optional 440 volt, 3-phase
- Electronic control pads allows the operator to easily adjust timer functions, heater temperature setting and seal time
- Digital display reflects the unit's operational status, including an error read-out for easy troubleshooting
- Easy strap feeding and adjustable external tension control and heat seal allows operators to strap packages in easy, efficient manner
- Easily adjustable table height for a variety of conveyor configurations
- Energy saving feature; motor automatically shuts down when machine is not in use
- Heavy-Duty casters allow for the machine to be easily moved throughout your facility
- Available for use with 3/8" or 1/2" strapping

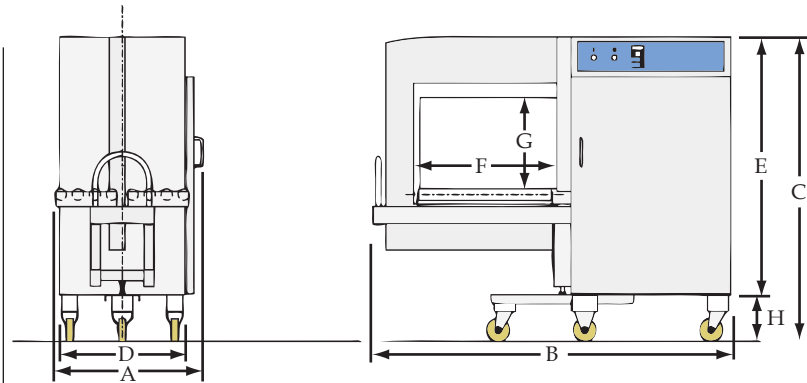

| | | | |
|---|-----------------|---|-----------------|
| A | 25.6" (650 mm) | E | 44.4" (1130 mm) |
| B | 65.7" (1670 mm) | F | 27.5" (700 mm) |
| C | 52.5" (1335 mm) | G | 15.7" (400 mm) |
| D | 21.6" (550 mm) | H | 8.07" (205 mm) |

| | |
|---------------------|--|
| Table Height: | 26.3" - 28.7" (668mm - 729mm) |
| Weight: | 506 lbs (230 kg) |
| Cycle Time: | 1.6 seconds |
| Cycle Initiation: | Foot Switch or Push Button |
| Strap Size: | 3/8" & 1/2" (9 mm & 12 mm) |
| Dispenser: | Internally located - 9" I.D./8" Face/ 18"O.D. |
| Package Size: | Min. 1.2" H x 1.6" W Max. Governed By Arch |
| Tension: | Internally located, adjustable 10 - 250 lbs. |
| Seal Head Location: | Side: 27.4" (695 mm) |
| Sealing Method: | Heat Seal |
| Mobility: | 3 swivel and 2 fixed casters |
| Power: | 220V, 3 phase, 60Hz or 440V, 3 phase, 60Hz |

Think Before You Print!

Dynaric, Inc.



®

5740 Bayside Road, Virginia Beach, VA 23455

Phone: (800) 526-0827 Fax: (757) 363-8016

E-mail: gd@dynaric.com

Web address: www.dynaric.com