


Dynaric DF-11A

Fully Automatic Bottom Seal Strapping Machine

Reliable
Operatorless
Fully Automatic
Strapping
Machine

Designed for the
General Packaging
Industry

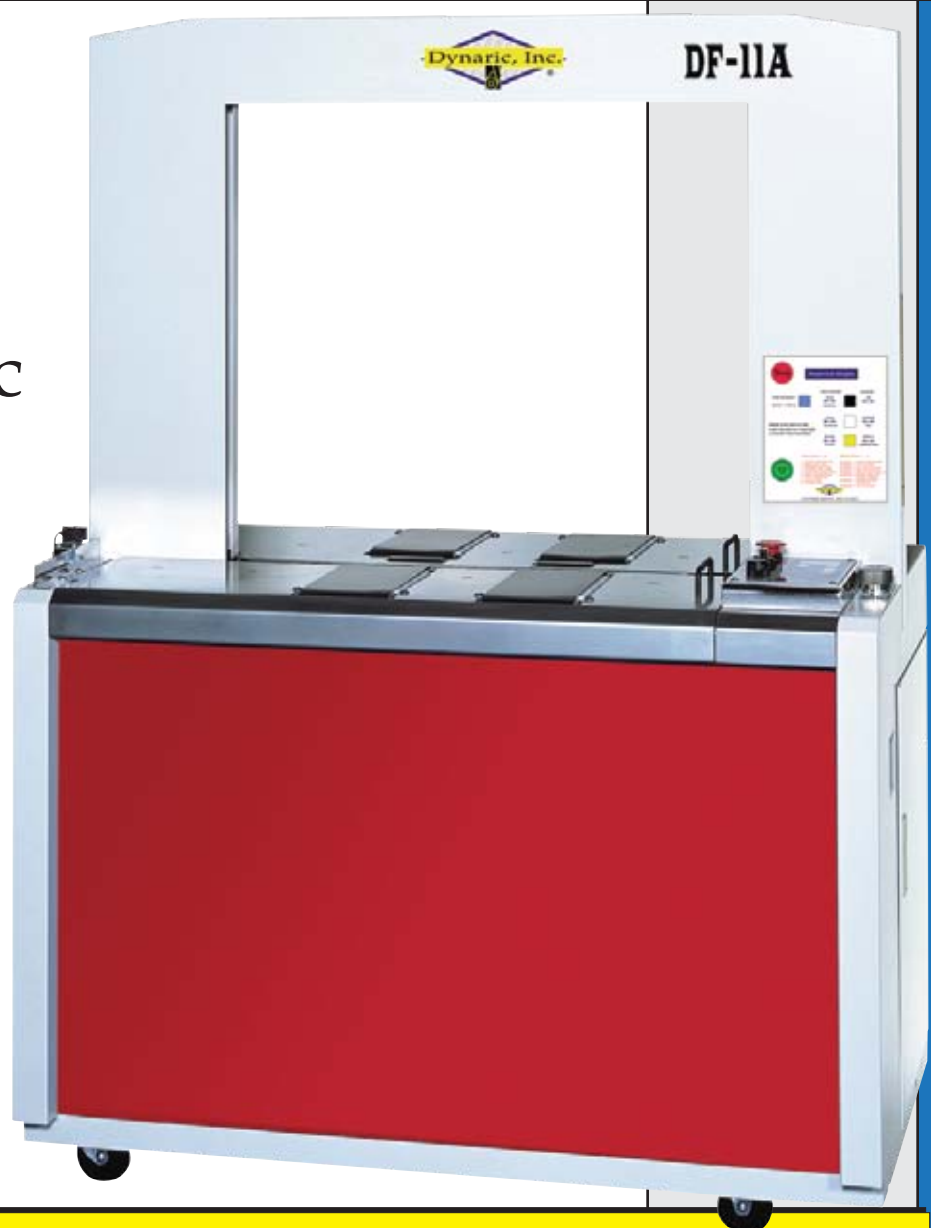

Increase Production - Reduce Cost

Think Before You Print!

Dynaric, Inc.



®

5740 Bayside Road, Virginia Beach, VA 23455


Phone: (800) 526-0827 Fax: (757) 363-8016

E-mail: gd@dynaric.com

Web address: www.dynaric.com

Dynaric DF-11A

- Anti-jam feature eliminates strap jams in unit
- Internal dispenser; minimizes required floor space
- Available in 220 volts, 3-phase or 440 volt, 3-phase (optional)
- Electronic control pads allows the operator to easily adjust timer functions, heater temperature setting and seal time
- Digital display reflects the unit's operational status, including an error read-out for easy troubleshooting
- Easy strap feeding and adjustable external tension control and heat seal allows operators to strap packages in easy, efficient manner
- Adjustable photo eyes allows you to automatically strap virtually any package size
- Energy saving feature; motor automatically shuts down when machine is not in use
- Heavy-Duty casters allow for the machine to be easily moved throughout your facility
- Available for use with 3/8" or 1/2" strapping

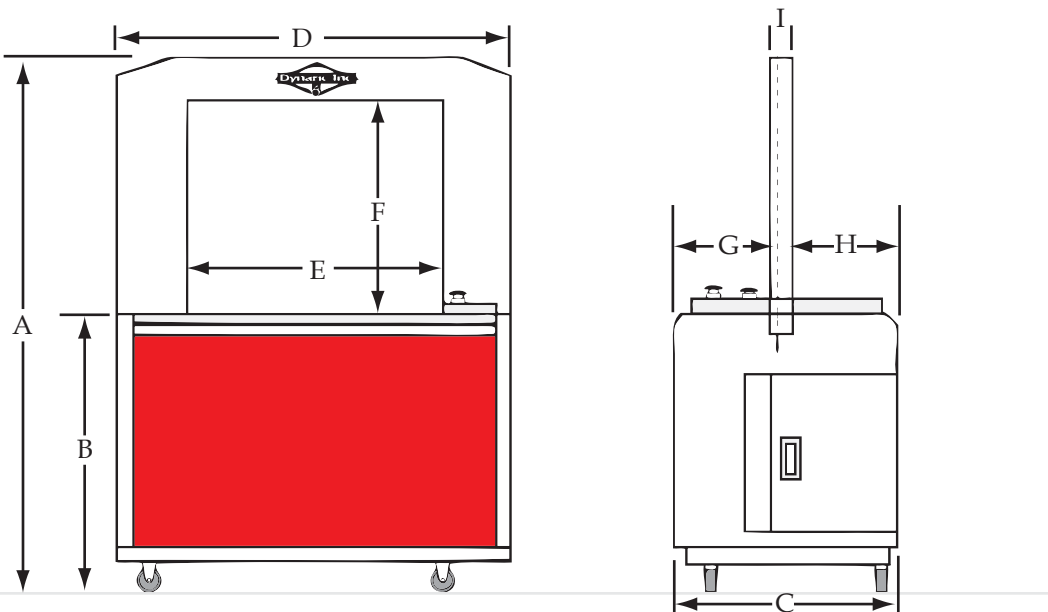

A	60.8" (1544 mm)
B	31.3" (795 mm)
C	25.6" (650 mm)
D	44.7" (1135 mm)
E	27.6" (700 mm)
F	23.6" (600 mm)
G	11.6" (295 mm)
H	14.0" (355 mm)
I	2.8" (71 mm)

Overall Width:	25.6" (650 mm)
Overall Length:	44.7" (1135 mm)
Overall Height:	60.8" (1544 mm)
Table Height:	31.3" (795 mm)
Weight:	445 lbs (201 kg.)
Cycle Time:	1.6 seconds
Seal Head Location:	Bottom
Sealing Method:	Heat Seal
Cycle initiation:	Manual Mode: Push Button Automatic Mode: Photo-eye
Strap Size:	3/8" to 1/2" (8mm -12.5mm)

Conveyor Speed:	82' per min. for a 33 lb. package 65' per min. for a 44 lb. package 49' per min. for a 66 lb. package
Package Size:	Min. 1.5" H x 8.5" W Max. Governed By Arch
Tension:	Externally located, adjustable 10 - 250 lbs.
Mobility:	2 swivel and 2 fixed casters
Dispenser:	Internally located 8" or 9" I.D./8" Face/18" O.D.
Power:	220 Volt or 440 Volt 3 Phase

Think Before You Print!

Dynaric, Inc.



®

5740 Bayside Road, Virginia Beach, VA 23455

Phone: (800) 526-0827 Fax: (757) 363-8016

E-mail: gd@dynaric.com

Web address: www.dynaric.com