

Dynaric, Inc.

DF-11C

Automatic Bottom Seal Strapping Machine

*Designed with a small,
compact sealing head*

The ability to do what most other machines are unable to do - tightly secure small packages and irregularly shaped items

Trim Moldings,
Wooden Dowels,
PVC Pipe, and Steel
Rods



Cost Reduction - Labor Savings

Dynaric, Inc.



®

Think Before You Print!

Certified Minority Owned Business


Phone: (800) 526-0827 | E-mail: gd@dynaric.com | Web: www.dynaric.com

Dynaric, Inc.

DF-11C

Automatic Bottom Seal Strapping Machine

- Ideal for strapping packages as small as 1.6" wide x 1.2" high
- Anti-jamming feature eliminates downtime caused by strap jams
- Easy automatic strap feeding
- Internal dispenser minimizes required floor space
- Operates on 120V single phase power, enabling it to be used in any location
- Equipped with a control pad that easily adjusts timer functions, heater temperature setting and seal time
- Digital display reflects the operational status, including an error code read out
- Easily adjustable stepless tension control
- Motor automatically shuts down when not in use
- Heavy duty casters for portability
- Accepts 3/8" strapping standard or 1/2" strapping as an option
- Table tops are a 1.5mm thick smooth stainless steel plate, without rollers

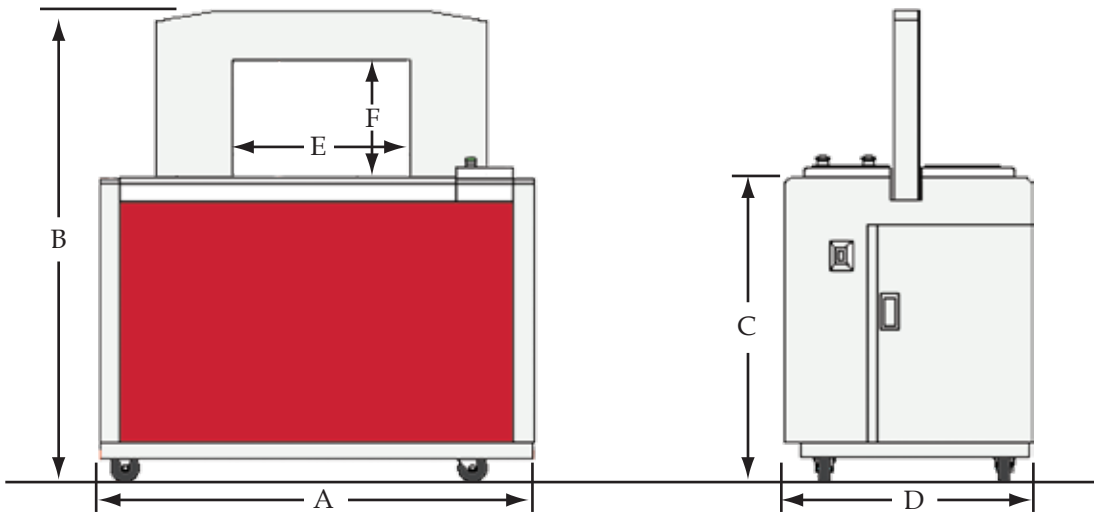

A	44.7" (1135 mm)
B	52.9" (1345 mm)
C	31.3" (795 mm)
D	25.6" (650 mm)
E	19.7" (500 mm)
F	15.75" (400 mm)

Overall Width:	25.6" (650 mm)
Overall Length:	44.7" (1135 mm)
Overall Height:	52.9" (1345 mm)
Table Height:	31.3" (795 mm)
Weight:	410 lbs (186 kg)
Cycle Time:	1.6 seconds
Cycle Initiation:	Palm switch or foot switch
Sealing Method:	Heat seal
Strap Size:	3/8" & 1/2" (9 mm & 12 mm)

Package Size:	Min.	1.6" W x 1.2" H
	Max.	Governed by arch
Tension:	Low tension; 40mm stroke, stepless variety	
Seal Head Location:	Bottom	
Mobility:	2.6" casters	
Dispenser:	Internally located - 9" I.D./8" Face/18" O.D.	
Power:	120V, single phase	
	220V, 3 phase, 60Hz	
	440V, 3 phase, 60Hz	



Think Before You Print!

Certified Minority Owned Business

Phone: (800) 526-0827 | E-mail: gd@dynaric.com | Web: www.dynaric.com